

Specification

- Flattened Floor flat from A to C pillar
- Zincaneal BHP steel substructure
- R12 Non slip commercial grade vinyl floor to modified area
- Base vehicle built to suit multiple fit out variations
- Fully insulated for noise reduction
- Remote under floor cassette lift or rear entry 2 post lift for passenger only
- Stand alone electrical system with sleep timer
- Accessible fusebox and resettable circuit breakers
- VB air suspension for improved ride
- Electric wheelchair restraints to front passenger position
- Electric parkbrake
- Removable front seats



Measurements

- Left side entry height 1520mm
- Height in front row position 1630mm
- Height in front row position 1640mm
- Height under steering wheel 800mm
- AFM K90 or Range of 2 post lifts for rear to suit passenger only vehicles


Options

- Paravan 6 way seat bases
- Huge range of driving controls and vehicle control integrations
- Boot mounted wheelchair hoist
- Multiple rear seating options

Mercedes Sprinter 311CDI RWD Mid wheel base

Side entry flat floor to front TEIR 1

Wheelchair occupant positions, left side powered ramp or Cassette lift

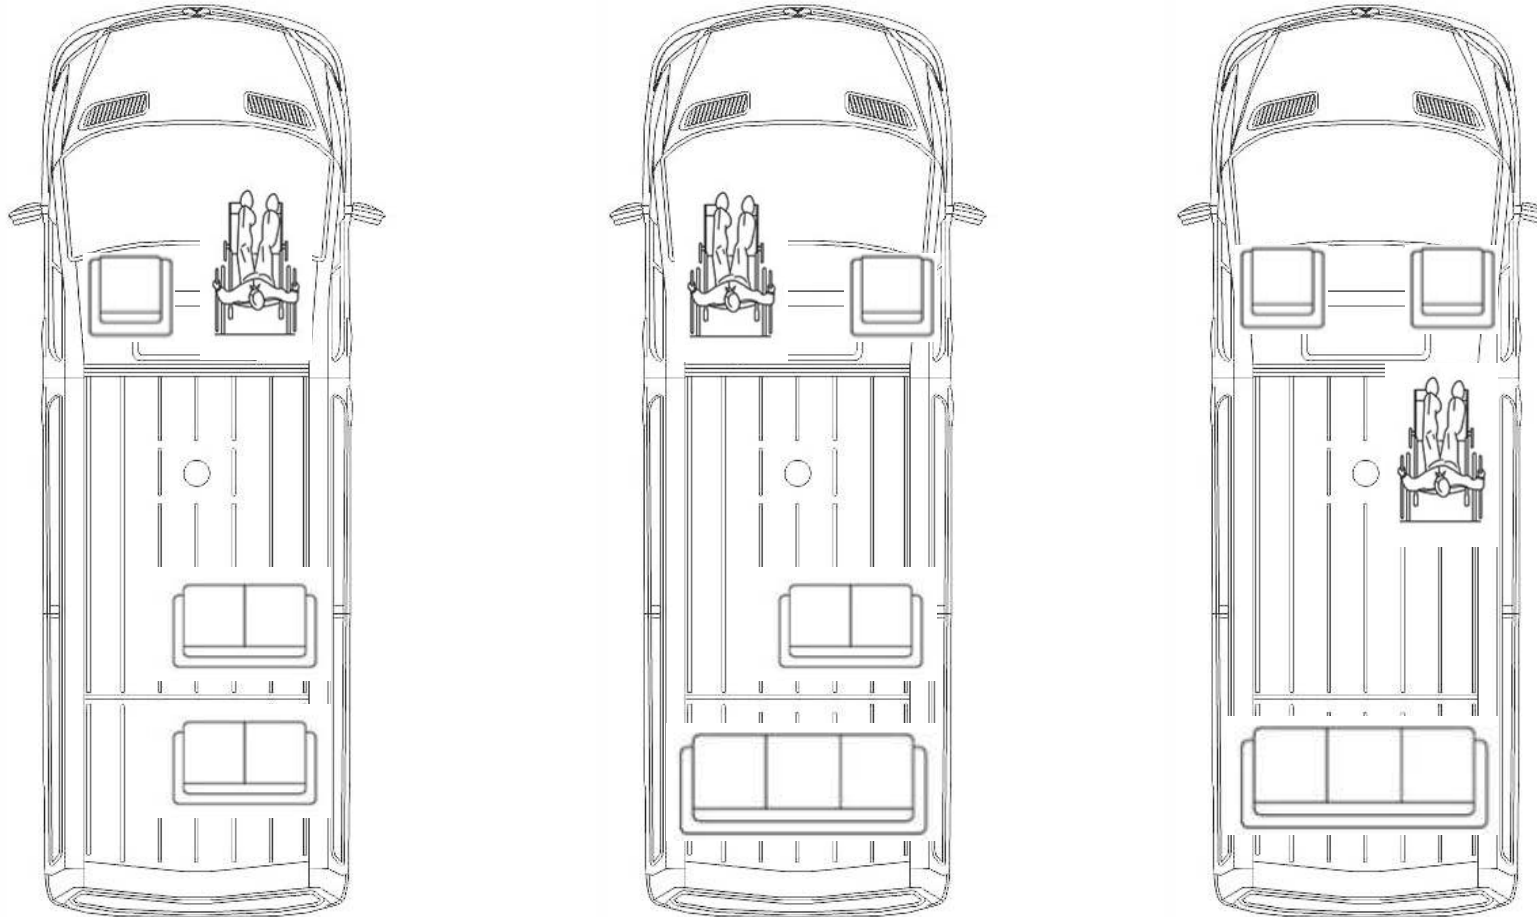

*All standard built vehicles equipped with removable front seats to enable occupant to travel as driver or passenger, powered restraints fitted to passenger position with manual rear restraints and seatbelt stalk. Drivers and second row restraints equipped according to clients specific needs and not included in base vehicle price.

*Rear seating layouts shown are for demonstration purposes only, rear seating will be configured to clients specific needs

Mercedes Sprinter 311CDI RWD Mid wheel base


Rear Entry flat floor to front TEIR 1

Wheelchair occupant positions, Rear 2 post lift

The only recommended seating position for rear entry flattened floor to front is passenger only as Mercedes sprinters are only available with manual barn doors, the wheelchair occupant would not be able to safely close these doors themselves meaning this configuration is best suited to a carer driven vehicle

*All standard built vehicles equipped with removable front seats to enable occupant to travel as driver or passenger, powered restraints fitted to passenger position with manual rear restraints and seatbelt stalk. Drivers and second row restraints equipped according to clients specific needs and not included in base vehicle price.


*Rear seating layouts shown are for demonstration purposes only, rear seating will be configured to clients specific needs

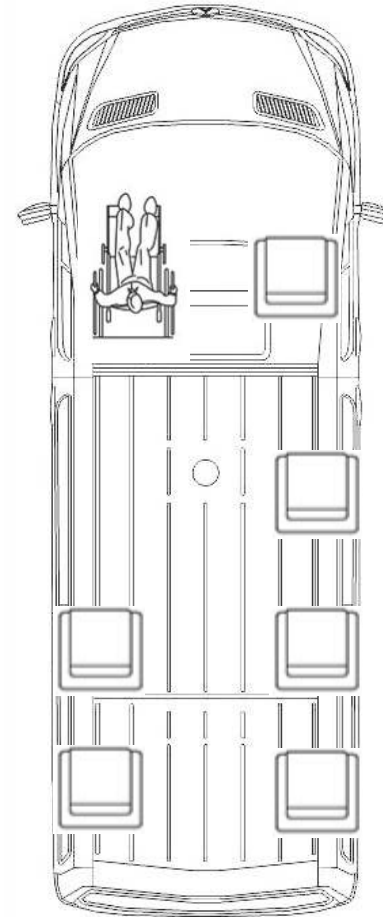

Mercedes Sprinter 311CDI RWD Mid wheel base

Rear entry flat floor to Row 2 TEIR 2

Wheelchair occupant positions, Rear 2 post lift

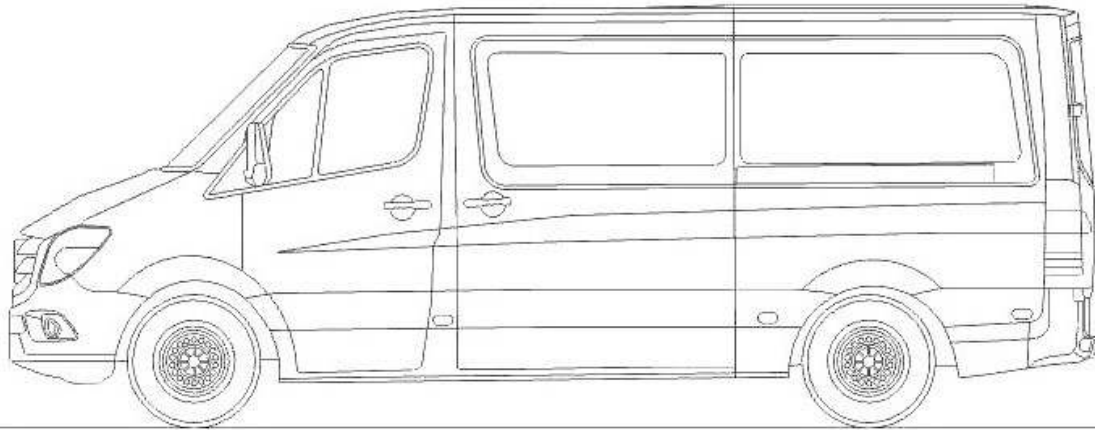

Specification

Flattened Floor flat from B to D pillar

R12 Non slip commercial grade vinyl floor to modified area

Fully insulated for noise reduction

Rear entry 2 post lift for passenger only

Stand alone electrical system with sleep timer

Accessible fusebox and resettable circuit breakers

VB air suspension for improved ride



Measurements

Rear entry height 1520mm

Height in second row position 1630mm

Height in front row position 1640mm

Range of 2 post lifts are available for rear to suit passenger only vehicles

Options

Multiple rear seating options


Docking stations

Paravan 6 way seat base to access front row

Mercedes Sprinter 311CDI RWD Mid wheel base


Rear entry flat floor to Row 2 TEIR 2

Wheelchair occupant positions, Rear 2 post lift

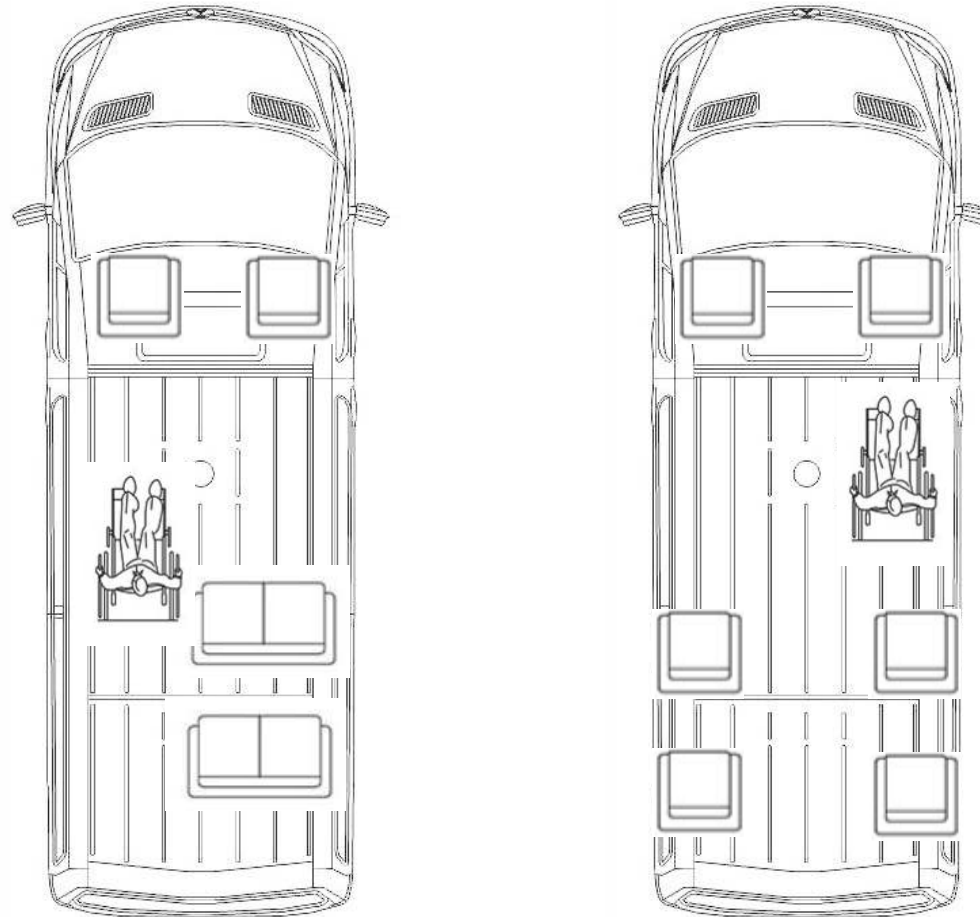

*All standard built vehicles equipped with removable front seats to enable occupant to travel as driver or passenger, powered restraints fitted to passenger position with manual rear restraints and seatbelt stalk. Drivers and second row restraints equipped according to clients specific needs and not included in base vehicle price.

*Rear seating layouts shown are for demonstration purposes only, rear seating will be configured to clients specific needs

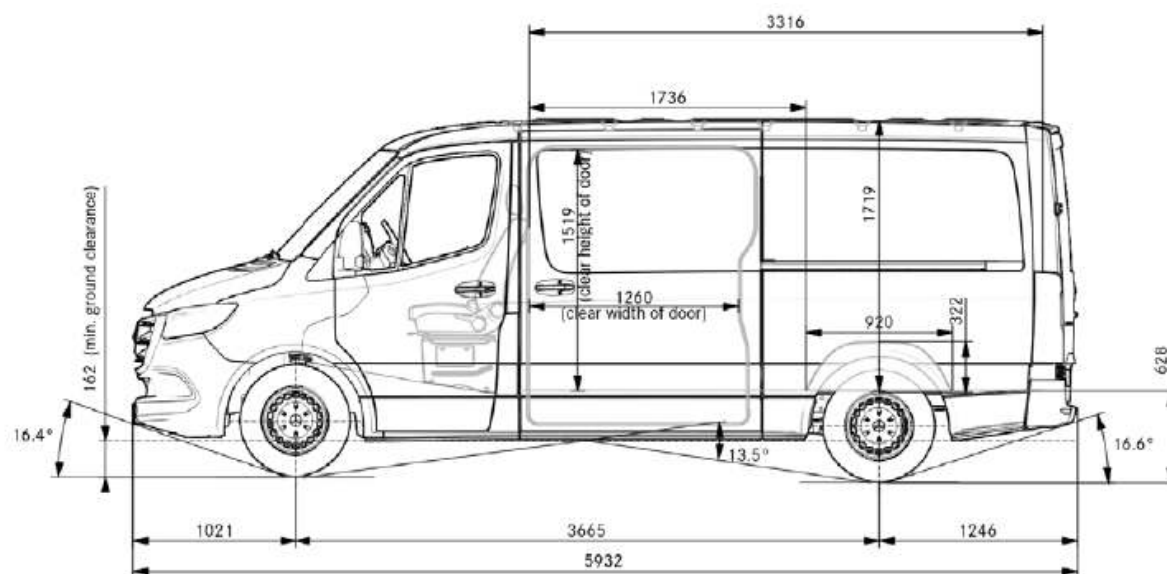

RWD, 3.55t, Standard roof

Designation	
Body Style	
Variant	311 MWB
Model Type / Baumuster:	90763323-AAA
Engine	654
Capacity [cc]	1950
Max. Power [kW]	84
Fuel Capacity [liter]	71
Length [mm]	5932
Width [mm]	2020
Height (Std. Roof) [mm]	2331
Cargo Vol. (Std. Roof) [m³]	9
Height (High Roof) [mm]	2620
Cargo Vol. (High Roof) [m³]	10.5
Height (Super High Roof) [mm]	na
Cargo Vol. (Super High Roof) [m³]	na
Ground Clearance [mm]	162
Wheelbase [mm]	3665
Overhang [mm]	1246
Transmission	9G-TRONIC AT
Axle Ratio	3,923
Maximum Towing [kg]	2000
GCM* [kg]	5550
GVM* [kg]	3550
Front Axle Mass Limit* [kg]	1650
Rear Axle Mass Limit [kg]	2250
Payload* [kg]	1372
Unladen Mass* [kg]	2178
EU Kerb Mass* [kg]	2247
Tare Mass* [kg]	2127